


UF400AAA series

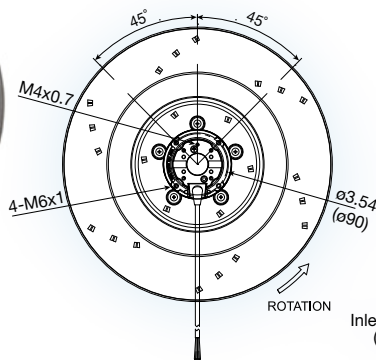

(400 dia. x 162.4 mm)

15.75 dia. x 6.39 inches

Features: **backward curved impeller**

Operating voltage: 230 VAC

Operating temp. -20° ~ 50°C

Construction: aluminum die cast motor base,
aluminum impeller



Bearing option: ball bearing

Motor: permanent split capacitor
required capacitor included

Air Flow: centrifugal

Connection: AWM 2517 lead wires

Protection: thermal

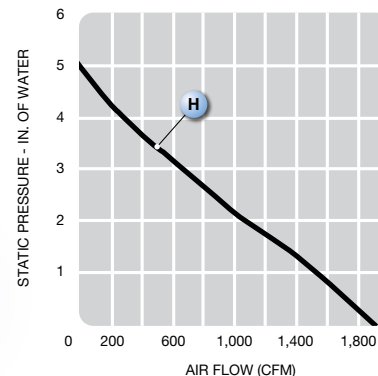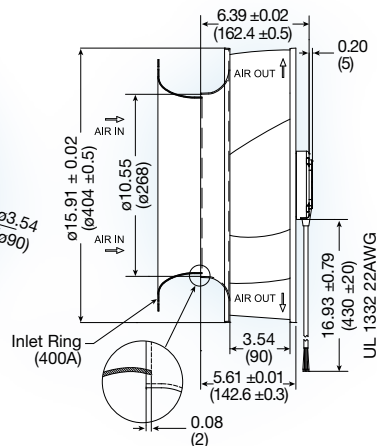

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF400AA23-H1C4A	230	50	287	1.26	1.70	1,250	53.8	1900	136.7	5.38	73	5.45