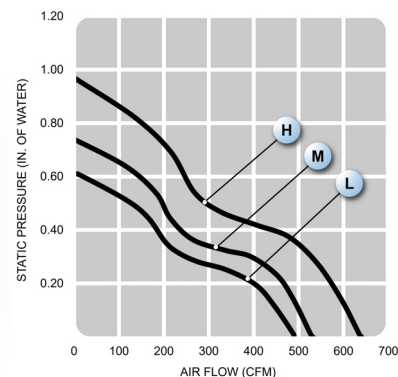
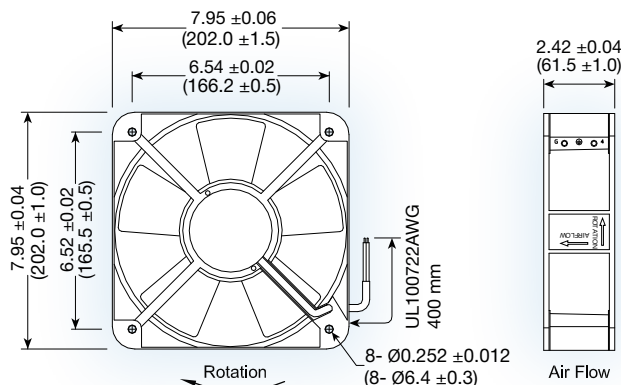


MH2060 series

**(200 x 200 x 60 mm)**

7.9 x 7.9 x 2.4 inches

Features: soft-start, auto-restart,
-10°C ~+70°C operating range

Operating Voltage: 24 or 48 VDC

Construction: UL94V-0 plastic impeller,
aluminum alloy frame

Bearing option: ball bearing

Air Flow: air exhaust over struts

Options: tachometer, PWM, alarm,
thermistor control, IP56

Model No.	Rated Voltage VDC	Current A		Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight g
		24	48		M ³ /Min.	CFM	MM	INCH		
MH2060H	24/48	2.50	1.20	3,000	18.13	640	24.64	0.97	68.0	1030
MH2060M	24/48	1.50	0.80	2,500	15.07	532	18.80	0.74	58.0	1030
MH2060L	24/48	1.00	0.50	2,000	13.88	490	15.49	0.61	50.0	1030