
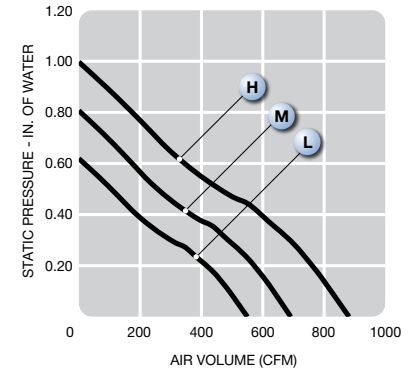


MH2589 series

**(254 x 254 x 89 mm)**

10.0 x 10.0 x 3.5 inches

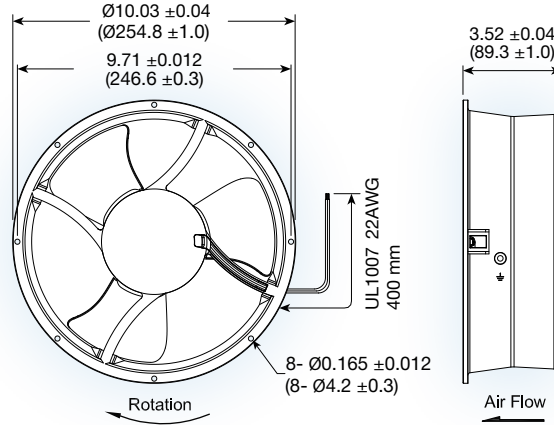

Features: soft-start, auto-restart,
-10°C ~+70°C operating range

Operating Voltage: 24 or 48 VDC

Construction: UL94V-0 plastic impeller,
aluminum alloy frame

Bearing option: ball bearing

Air Flow: air exhaust over struts

Options: tachometer, PWM, alarm,
thermistor control, IP56

Model No.	Rated Voltage VDC	Current A		Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dba	Weight g
		24	48		M ³ /Min.	CFM	MM	INCH		
MH2589H	24/48	3.50	2.00	2,600	25.21	890	25.65	1.01	68.0	2140
MH2589M	24/48	2.20	1.20	2,100	20.36	719	20.83	0.82	55.0	2140
MH2589L	24/48	1.50	0.80	1,600	15.51	548	15.75	0.62	42.0	2140