



MI8-EC12-DF series





(224 x 200 x 220 mm)

8.82 x 7.87 x 8.66 inches

Construction:	UL94V-0 plastic impeller
Frame:	steel
Motor Design:	EC Three Phase Six Pole Motor
Bearing option:	2 ball bearings
Lead Wire:	1.5m Cable with Wall Plug
Features:	Speed Controller (5m Cord), auto-restart, soft start, IPX4

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Speed	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise	Wt.
	VAC	HZ	W	A	RPM	M ³ /Min.	CFM	MM	INCH	dB(A)	
MI8-EC12-DF	110	50/60	75	1.03	3,800	20.11	710	53.0	2.09	61.6	2500

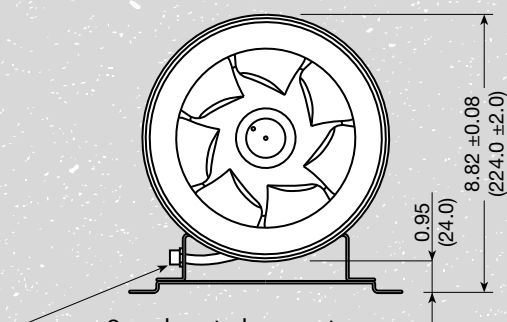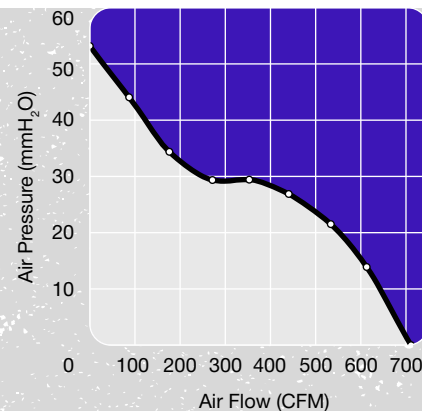

Speed control connector with 5m cable

