
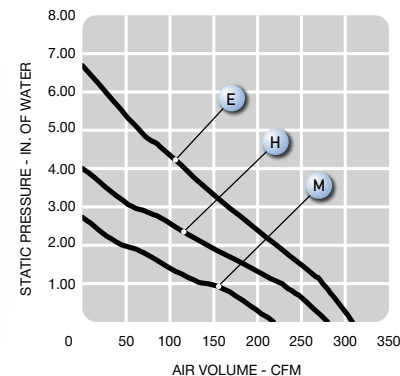


MS1238-T series

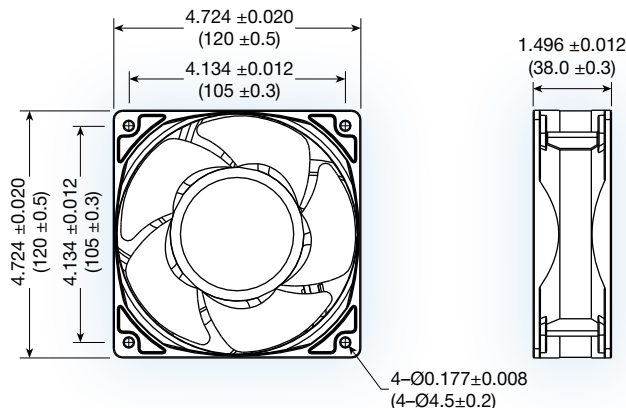

(120 x 120 x 38 mm)

4.72 x 4.72 x 1.50 inches

Features: soft start, polarity protection, auto-restart

Operating Voltage: 12, 24 and 48 VDC

Construction: thermoplastic PBT UL94V-0 impeller and aluminum frame

Bearing option: ball bearing

Air Flow: air exhaust over struts

Options:

- tachometer;
- locked rotor alarm signal;
- PWM speed control;
- conformal coating;
- constant speed / OVP

Model No.	Rated Voltage VDC	Current A			Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight g
		12	24	48		M ³ /Min.	CFM	MM	INCH		
MS1238M-T	12/24/48	3.0	1.5	0.8	8,000	6.17	218.0	69.1	2.72	67	295
MS1238H-T	12/24/48	5.8	2.9	1.5	10,000	7.96	281.0	101.9	4.01	70	295
MS1238E-T	12/24/48	6.5	5.0	2.5	12,000	8.74	308.5	169.9	6.69	78	295

*Additional performance levels available, contact Mechatronics for more options