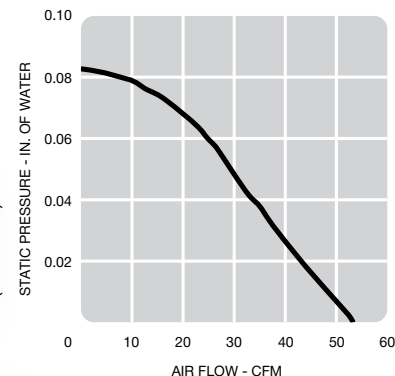
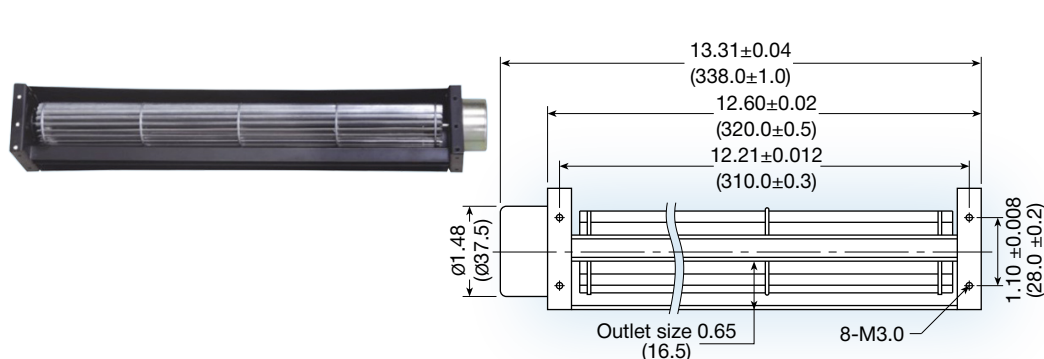


MXF30290H series

**(338 x 50.5 x 48.4 mm)**

13.31 x 1.99 x 1.91 inches

Features: soft start, auto-restart, IP42,
-25°C ~+70°C operating range


Operating Voltage: 12 or 24 VDC

Construction: sheet steel frame;
aluminium impeller

Bearing option: ball bearing

Motor: Class B insulation

Options: tachometer, PWM, voltage speed
control



Model No.	Rated Voltage V	Rated Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Wt. g
				M ³ /Min.	CFM	MM	INCH		
MXF30290H-H	12VDC	0.34	2,700	1.40	52.9	2.1	0.08	36	300
MXF30290H-H	24VDC	0.13	2,700	1.50	52.9	2.1	0.08	36	300