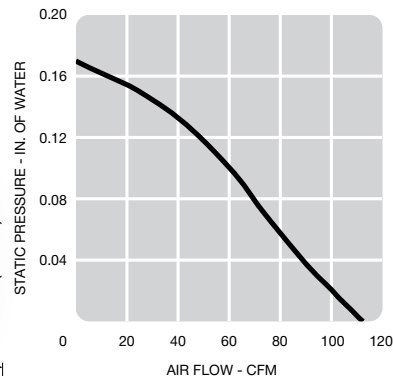
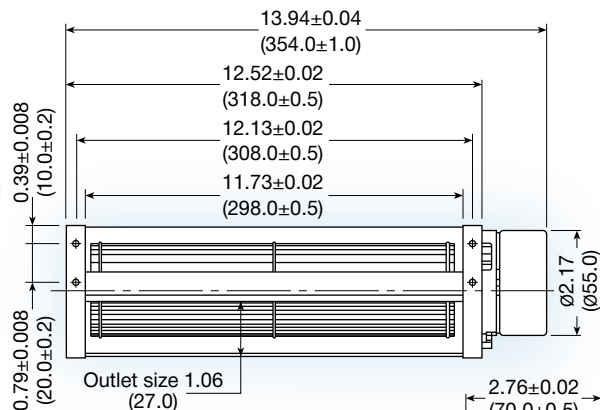


MXF50290H series

**(354 x 70 x 70 mm)**

13.94 x 2.76 x 2.76 inches

Features: soft start, auto-restart, IP42,
-25°C ~+70°C operating range


Operating Voltage: 12 or 24 VDC

Construction: sheet steel frame;
aluminium impeller

Bearing option: ball bearing

Motor: Class B insulation

Options: tachometer, PWM, voltage speed
control



Model No.	Rated Voltage V	Rated Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Wt. g
				M ³ /Min.	CFM	MM	INCH		
MXF50290H-H	12/24VDC	0.41/0.2	2,100	3.20	112.9	4.3	0.17	45	630