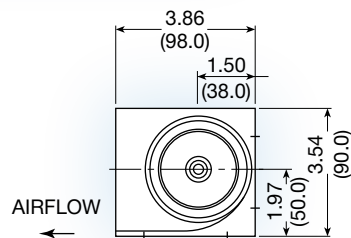
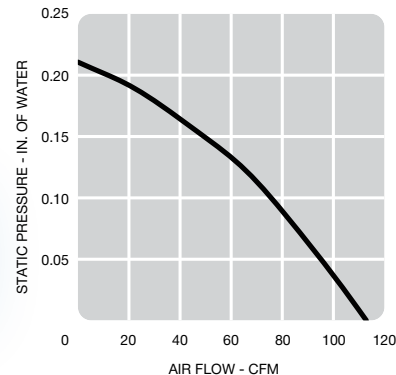
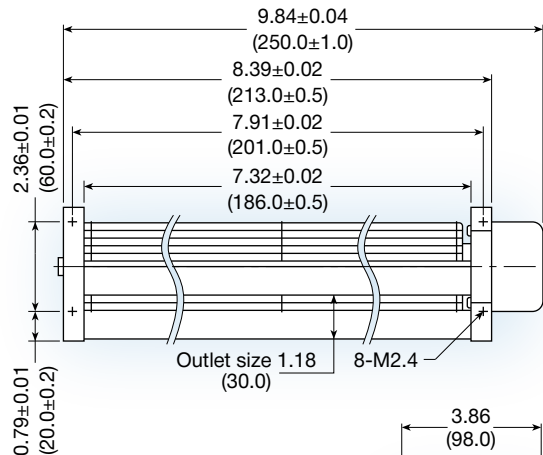


MXF60180H series

**(250 x 98 x 90 mm)**

9.84 x 3.86 x 3.54 inches

Features: soft start, auto-restart, IP42,
-25°C ~+70°C operating range

Operating Voltage: 12 or 24 VDC

Construction: sheet steel frame;
aluminium impeller

Bearing option: ball bearing

Motor: Class B insulation

Options: tachometer, PWM, voltage speed control

Model No.	Rated Voltage V	Rated Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Wt. g
				M ³ /Min.	CFM	MM	INCH		
MXF60180H-H	12/24VDC	1.20/0.60	3,100	3.21	113.2	5.3	0.21	52	1130