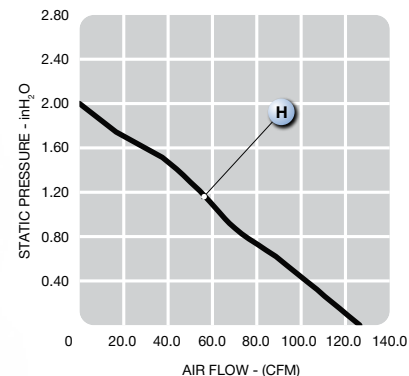
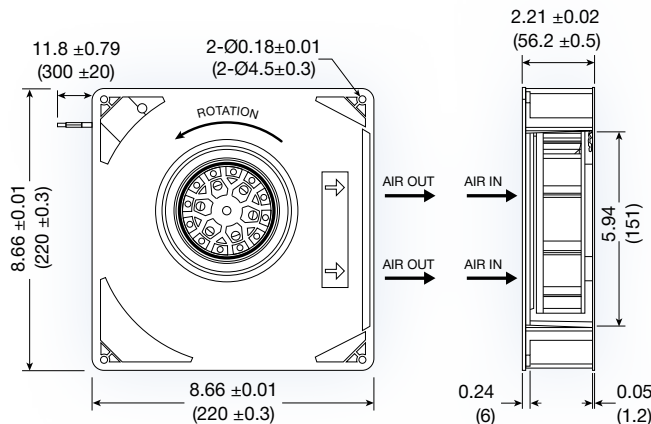


TB1656 series

**(220 x 220 x 56 mm)**

8.6 x 8.6 x 2.2 inches

Features: high pressure flat pack blower,
-20°C ~+70°C operating range

Construction: Plastic PA covering glass fiber
impeller & plastic+metal frame

Bearing option: ball bearing

Connection: 22 AWG lead wires

Protection: electronically-protected

Options: tachometer output or locked rotor
alarm signal, PWM, IP68

Model No.	Rated Voltage V	Current A			Speed RPM	Air Volume		Max/ Static Pressure (H ₂ O)		Sound Noise dbA	Weight g
		12	24	48		M ³ /Min.	CFM	MM	INCH		
B1656H	12/24/48	1.91	0.92	0.45	2,900	3.57	126.0	52.32	2.06	67	1400