



# UF250APA-F series

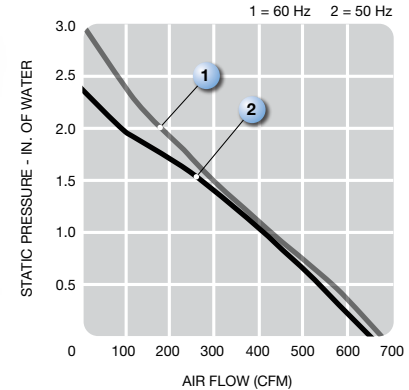

**(259 dia. x 131 mm)**  
10.20 dia. x 5.15 inches

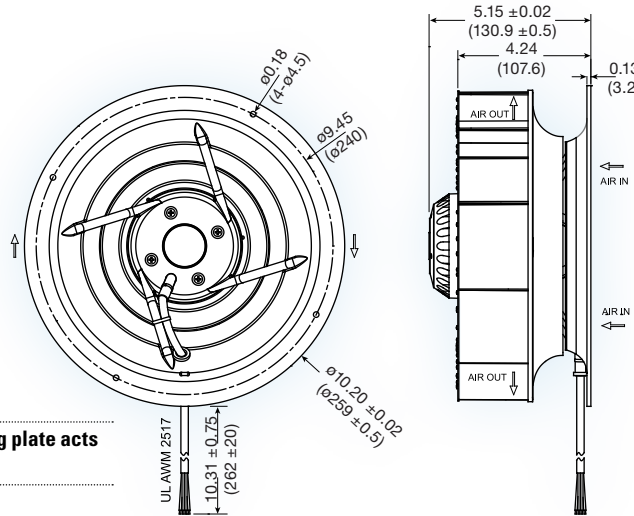

**Features:** integrated mounting plate acts as inlet ring

**Operating voltage:** 115 or 230 VAC

**Operating temp.** -40° ~ 50°C

**Construction:** aluminum die cast motor base; UL94V-0 reinforced nylon impeller

**Bearing option:** ball bearing

**Motor:** permanent split capacitor required capacitor included

**Air Flow:** centrifugal

**Connection:** AWM 2517 lead wires

**Protection:** thermal

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H <sub>2</sub> O)		Sound Noise dbA	Weight kg
							M <sup>3</sup> /Min.	CFM	MM	INCH		
UF250APA12-H1C2F	115	50	170	1.50	3.10	2,600	18.5	653	61	2.4	71	3.3
	115	60	240	2.10	3.00	2,700	19.3	681	78	3.1	72	3.3
UF250APA23-H1C2F	230	50	170	0.77	1.57	2,600	18.5	653	56	2.4	71	3.3
	230	60	240	1.00	1.52	2,700	19.3	681	78	3.1	72	3.3

