
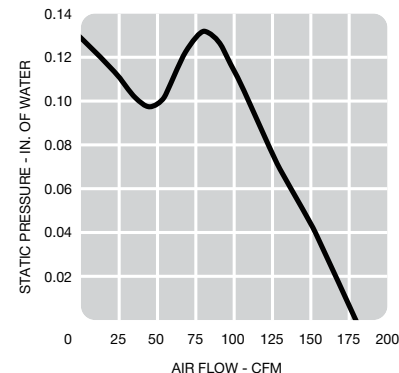


UF9029 series

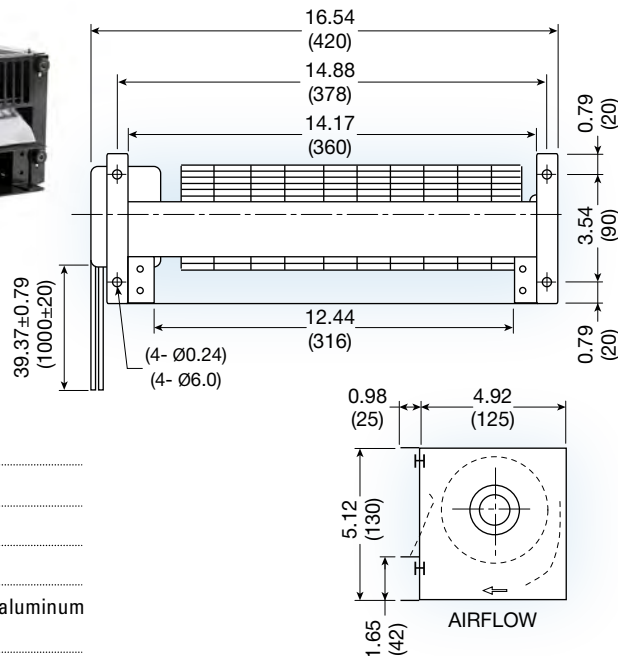

(420 x 150 x 130 mm)

16.54 x 5.91 x 5.12 inches

Features: crossflow blower

Operating Temp. -40°C ~+70°C

Operating Voltage: VAC 120 or 230

Construction: steel frame, plastic & aluminum impeller

Bearing option: ball bearing or sleeve

Motor: capacitor start-run or shade pole

Connection: 22 AWG lead wires

Protection: impedance protected or thermally protected

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Wt. g
							M ³ /Min.	CFM	MM	INCH		
UF9029CBP12H-L	120	60	31	0.27	0.40	1,560	5.00	177.0	3.3	0.13	46	3000
UF9029CBP23H-L	230	60	31	0.13	0.19	1,560	5.00	177.0	3.3	0.13	46	3000