

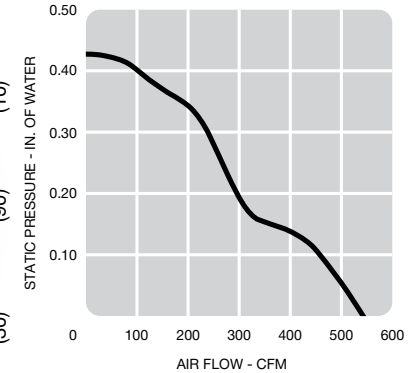


UF9060 series

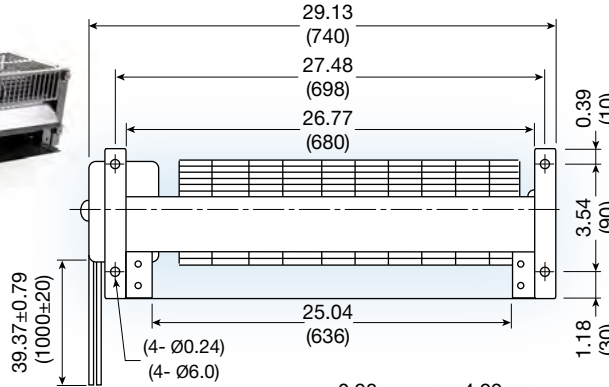

(740 x 150 x 130 mm)

29.13 x 5.91 x 5.12 inches

- Features: crossflow blower
- Operating Temp. -40°C ~+70°C
- Operating Voltage: VAC 120 or 230
- Construction: steel frame, plastic & aluminium impeller
- Bearing option: ball bearing or sleeve
- Motor: capacitor start-run or shade pole
- Connection: 22 AWG lead wires
- Protection: impedance protected or thermally protected

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Wt. g
							M ³ /Min.	CFM	MM	INCH		
UF9060CBP12H-L	120	60	160	1.25	0.40	2,100	15.00	530.0	11.0	0.43	54	5300
UF9060CBP23H-L	230	60	160	0.70	0.75	2,100	15.00	530.0	11.0	0.43	54	5300

